

V-two

Broadcast-quality cat.5/6 extenders for VGA, audio & RS-232

- broadcast-inspired pro-quality products
- VGA up to 1920 x 1200 (0-300m cat.5/6)
- continuously variable EQ and gain (sharpness & brightness)
- CD quality stereo audio (line level, 3.5mm jack)
- downstream RS-232 (up to 19200 baud)
- line-powered (from Tx or Rx)
- rugged design with comprehensive ESD protection



Transmit unit

- plug and play operation
- RS-232 on simple Phonenix connector
- small dimensions (142x65x29mm inc mounting flange)
- supplied with high quality psu



Ordering info

Description	Part No
V1T-0101SN V-series RGBHV + audio + RS-232 Tx interface (includes PSU-24/UK) (has a male VGA i/p)	V2T-0101-SN

Distribution amps

- 2, 8 and 16-way options
- loop-thru on 8-way and 16-way
- 8 & 16-way in 19" 1U case with integrated IEC psu
- compact 2-way has RS-232 on Phoenix connector
- 8-way and 16-way units use 9-pin for RS-232




Ordering info

Description	Part No
V-series 2-way RGBHV + audio + RS-232 distribution amplifier (includes PSU-24/UK) (has a male VGA i/p)	V2T-0102SN
V-series 8 way RGBHV + audio + RS-232 distribution amplifier with input loop-thru. 19" 1U enclosure, internal IEC PSU. (has a male VGA i/p)	V2T-0108RL
V-series 16 way RGBHV + audio + RS-232 distribution amplifier with input loop-thru. 19" 1U enclosure, internal IEC PSU. (has a male VGA i/p)	V2T-0116RL

Receive units

- line-powered
- continuously adjustable EQ and brightness
- 1920 x 1200 resolution at up to 300m
- RS-232 on simple Phonenix connector
- with or without cat.6 skew correction
- compact dimensions (142x65x29mm (inc mounting flange))
- skew Rx has 62ns delay & sub-pixel resolution

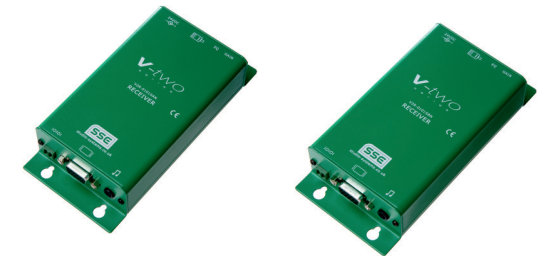

Ordering info

Description	Part No
V-series RGBHV + audio + RS-232 receiver - up to 300m cable with continuous (non-stepped) manual EQ, line powered	V2R-0101SAN
V-series RGBHV + audio + RS-232 receiver - up to 300m cable with continuous (non-stepped) manual EQ. line powered with skew correction	V2R-0101SBN